


# HEPA FILTERED GARMENT & MATERIAL STORAGE CABINETS & PASS THRUS

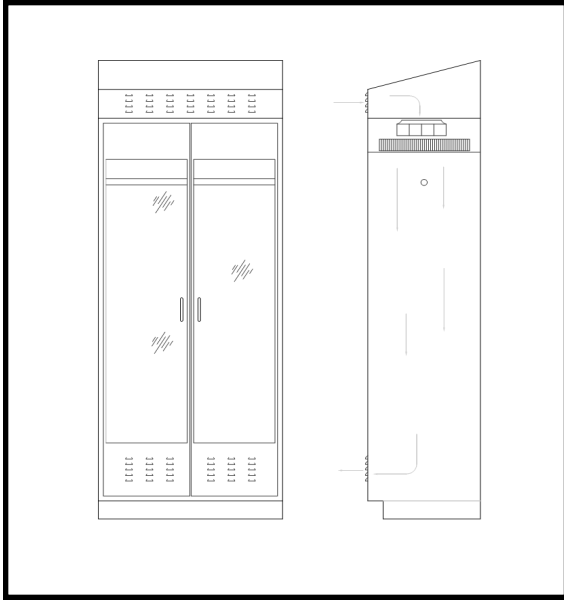

## **STANDARD FEATURES**

- Unit construction: 18 ga. 304 stainless steel with #4 finish.
- Integral Blower/Filter Module 99.99% efficient @ 0.3 microns.
- Stainless Steel framed full-light clear acrylic doors.
- Perforated stainless steel shelving for MCLF Series.
- Heavy gauge stainless steel 1/4" diameter rod for GCHF Series.
- 10 ft. power cord.
- Single Pass configuration low door grille discharge
- Sloped Top

## **OPTIONAL FEATURES**

- 100% 316L stainless steel construction with #4 finish.
- ULPA filtration 99.9995% efficient @ .12 microns.
- Optional voltages in 230 v 60 hz 1 ph, and 277 v 60 hz 1 ph
- Electro magnetic interlocked doors
- Mechanically interlocked doors
- Recirculating configuration
- Cross flow configured
- Integral flow-through lighting.
- Solid doors/sliding doors.
- Adjustable shelves
- Wire shelves
- Heavy-duty shelving for high load bearing.
- Custom sizes.

## **OPTIONAL PASS THRU CONFIGURATION SHOWN WITH SPLIT DOUBLE DOORS BOTH SIDES LIGHTED INTERIOR AND MAGNETIC INTERLOCK**

## **NOTE:**

- All filters are PSL challenged at factory to insure media integrity. Certificates of conformance are available upon request.
- Unit performance meets or exceeds standards as specified in Fed. Std. 209E / ISO 5 and IES-RP-CC-002.

MODEL #	O.A. UNIT SIZE	STD ELECTRICAL	PERFORMANCE
MCLF-36	22"d x 36"w x 78"h	115 v - 60hz - 1 ph - FLA= 1.6	90 FPM +/- 20%
GCLF-36	22"d x 36"w x 78"h	115 v - 60hz - 1 ph - FLA= 1.6	90 FPM +/- 20%
MCLF-48	22"d x 48"w x 78"h	115 v - 60hz - 1 ph - FLA= 1.6	90 FPM +/- 20%
GCLF-48	22"d x 48"w x 78"h	115 v - 60hz - 1 ph - FLA= 1.6	90 FPM +/- 20%

All information herein is subject to change without notice.

all catalog dimensions are nominal.

